


Alat za poravnavanje prihvata točkova ("dropova")

1692/4



Profili

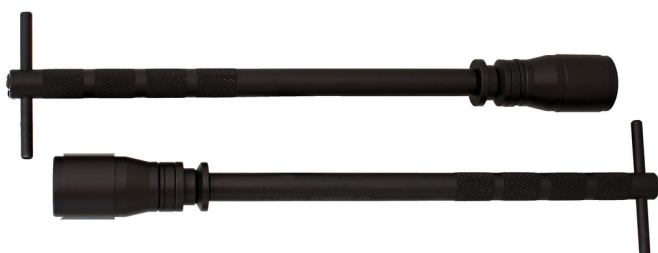

Opis proizvoda

- materijal: premium flex plus alatni čelik
- površinska zaštita: bruniran (fosfatiran) po standardu DIN 50938

Kako koristiti alat:

- Prvo se skine točak, alat se umetne u viljušku/drop i primenom sile na ručke alata prihvatni točka se krive dok ne postanu paralelni, tj. dok se krajevi alata ne dovedu u osu.



618412

D

30

B

84

L

309,5



1222

* Fotografije proizvoda su simbolične. Sve dimenzije su u mm, a težina u gramima. Sve navedene dimenzije mogu odstupati u granicama tolerancija.

Upotreba (slike)

